





Starlink Standard Kit


The Starlink Standard kit is designed for residential users and everyday internet applications. Your Standard Kit includes everything you need to connect to the internet in minutes, including power supply, WiFi router and base




Starlink Standard Kit - What's in The Box

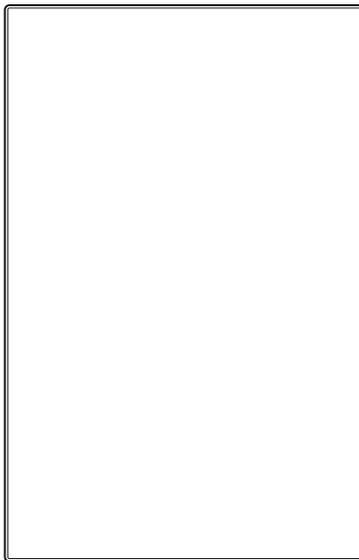

Starlink Cable
15 m
(49.2 ft)



AC Power Cable
1.5 m
(4.92 ft)



Power Supply
1.5 m
(4.92 ft)


Package Weight:

6.73 kg (14.83 lbs)



Package Dimensions:

652.4 x 451.7 x 97.9 mm (25.69 x 17.78 x 3.84 in)


Starlink Dish

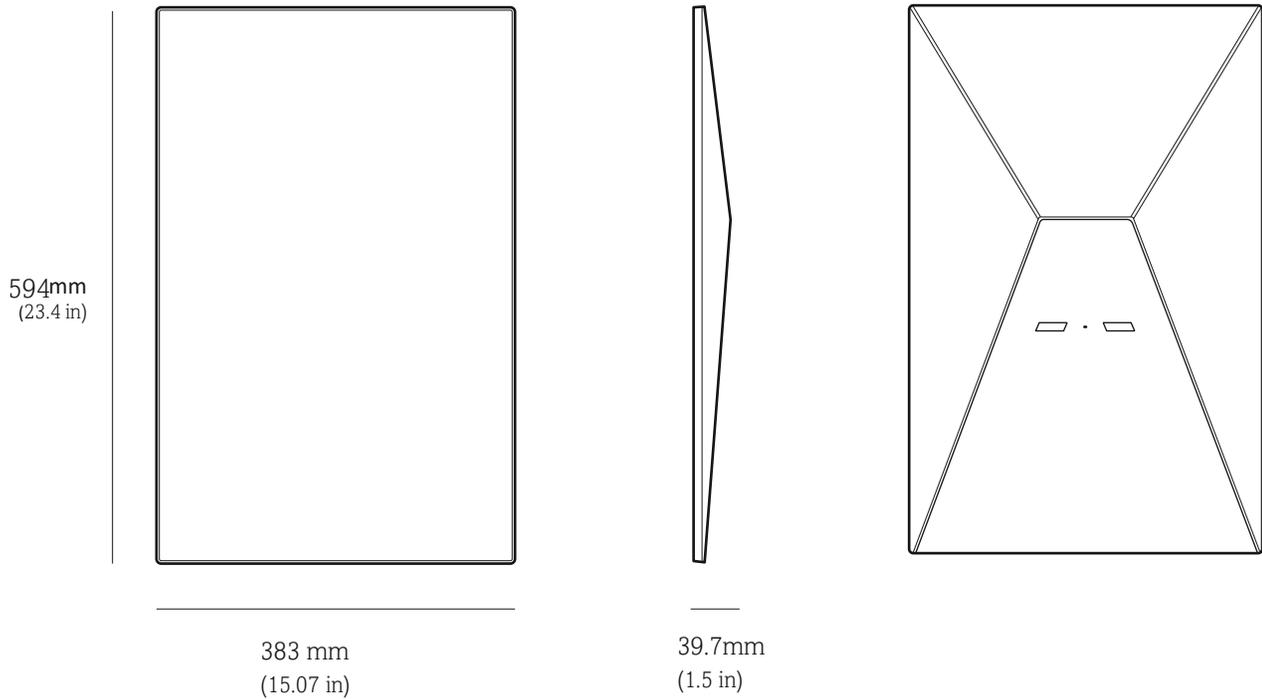

Antenna	Electronic Phased Array
Field of View	110°
Orientation	Software Assisted Manual Orienting
Weight	2.9 kg (6.4 lb) 3.2 kg (7 lb) with Kickstand 3.8 kg (8.3 lb) with Kickstand & 15 m Cable
Environmental Rating	IP67 Type 4
Operating Temperature	-30°C to 50°C (-22°F to 122°F)
Wind Speed	Operational: 96 kph+ (60 mph+)
Snow Melt Capability	Up to 40 mm / hour (1.5 in / hour)
Power Consumption	Average: 75 - 100 W

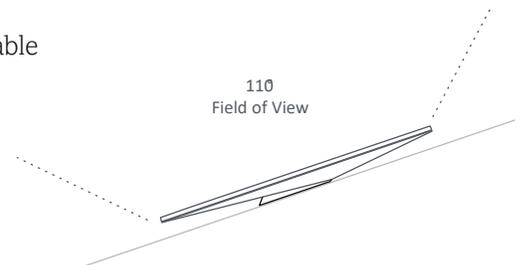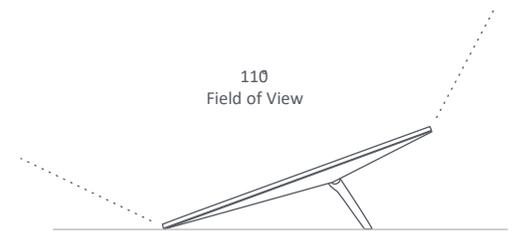


Router

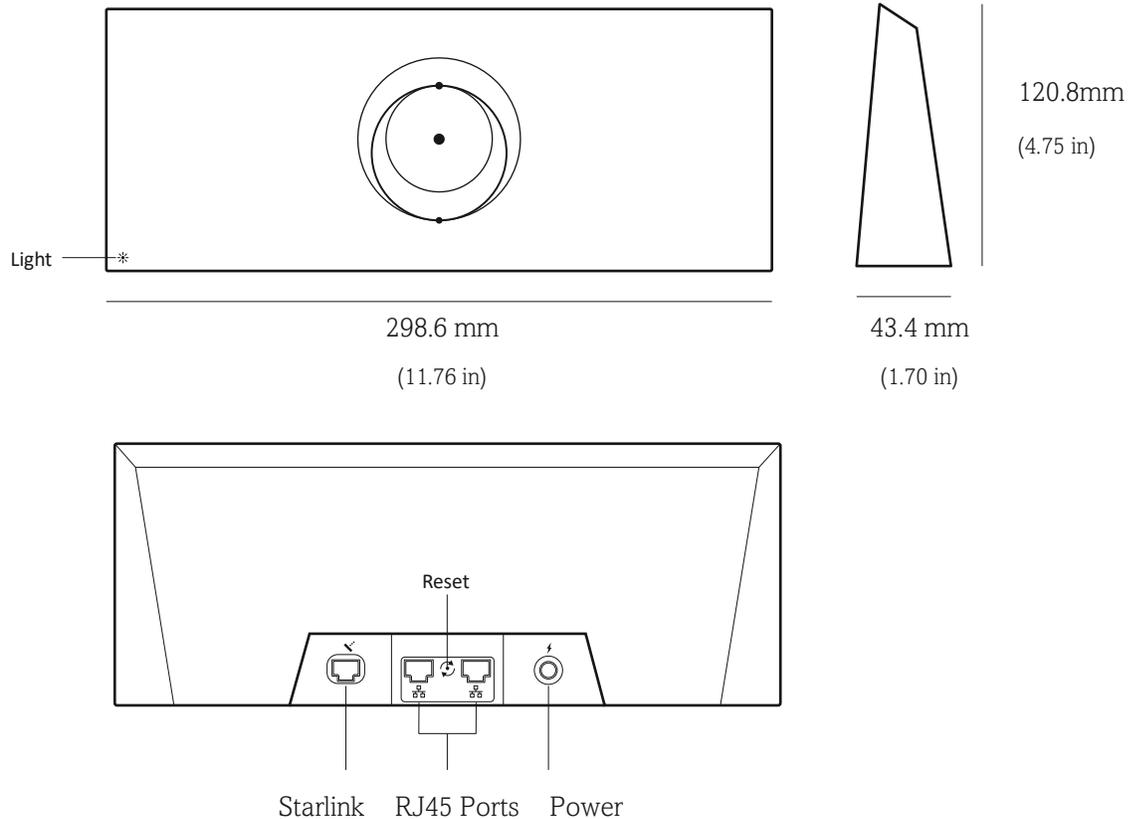


Product Dimensions	43.4 x 298.6 x 120.4 mm (1.7 in x 11.76 in x 4.74 in)
Wi-Fi Technology	802.11 a/b/g/n/ac/ax
Generation	WiFi 6
Radio	Tri Band 4 x 4 MU-MIMO
Ethernet Ports	Two (2) Latching Ethernet LAN ports with removable cover
Coverage	Up to 297 m ² (3,200 ft ²)
Operating Temperature	-30°C to 50°C (-22°F to 122°F)
Weight	0.57 kg (1.25 lbs)
Security	WPA2
Environmental Rating	IP56 Rated (Water Resistant), configured for indoor use
Power Indicator	LED face plate, lower left corner of router
Mesh Compatibility	Compatible with Starlink Gen 2 and Gen 3 Mesh Nodes, up to 3 Starlink Mesh Nodes
	*Not compatible with 3rd party mesh systems
Devices	Connect up to 235 devices

Kick Stand


142 mm
(5.9 in)

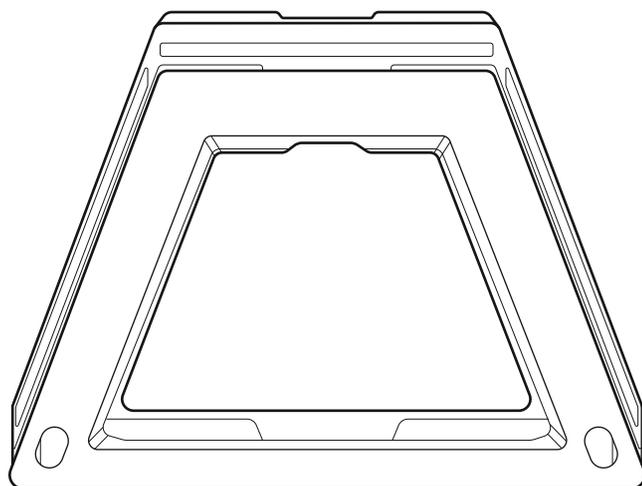


184 mm
(7.2 in)



27.4 mm
(1.1 in)

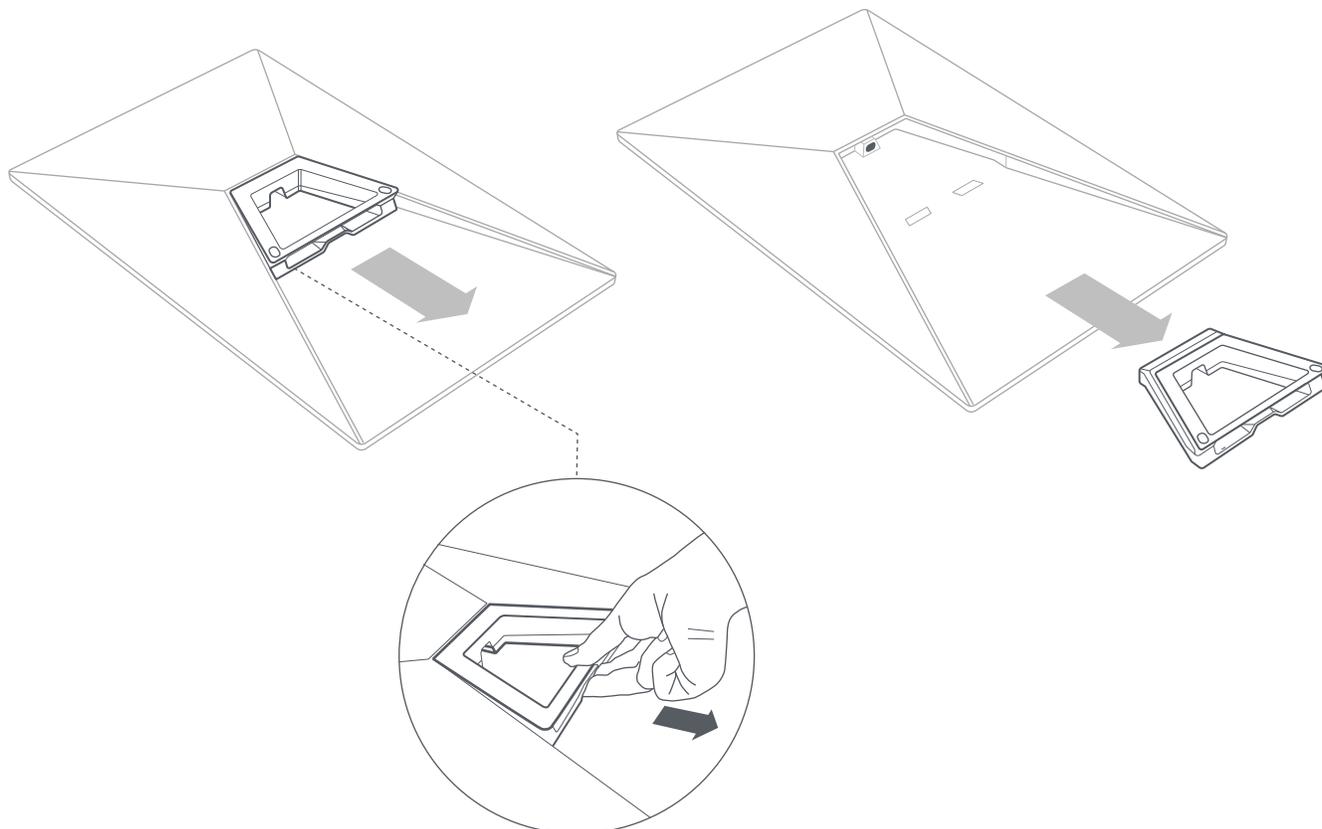

Power Supply

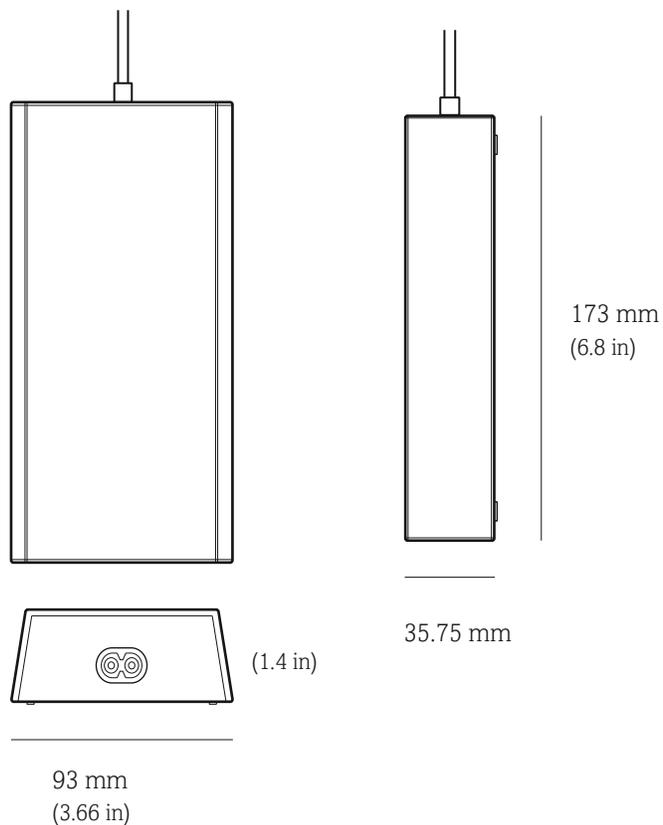


Product Dimensions 173 x 93 x 35.75 mm (6.8 in x 3.66 in x 1.4 in)

Weight 0.65 kg (1.43 lbs)


Environmental Rating IP66 Type 4


Operating Temperature -30°C to 60°C (-22 to 140°F)

Power Specifications 100-240V ~ 2.5A 50 - 60 Hz

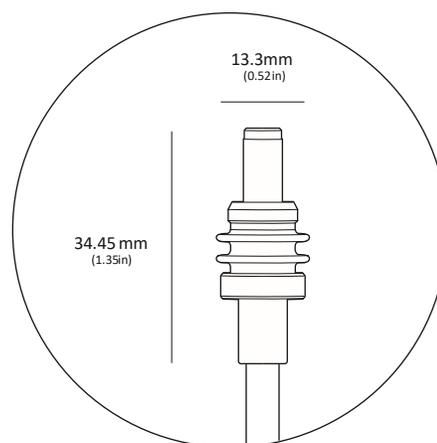

Starlink Cable

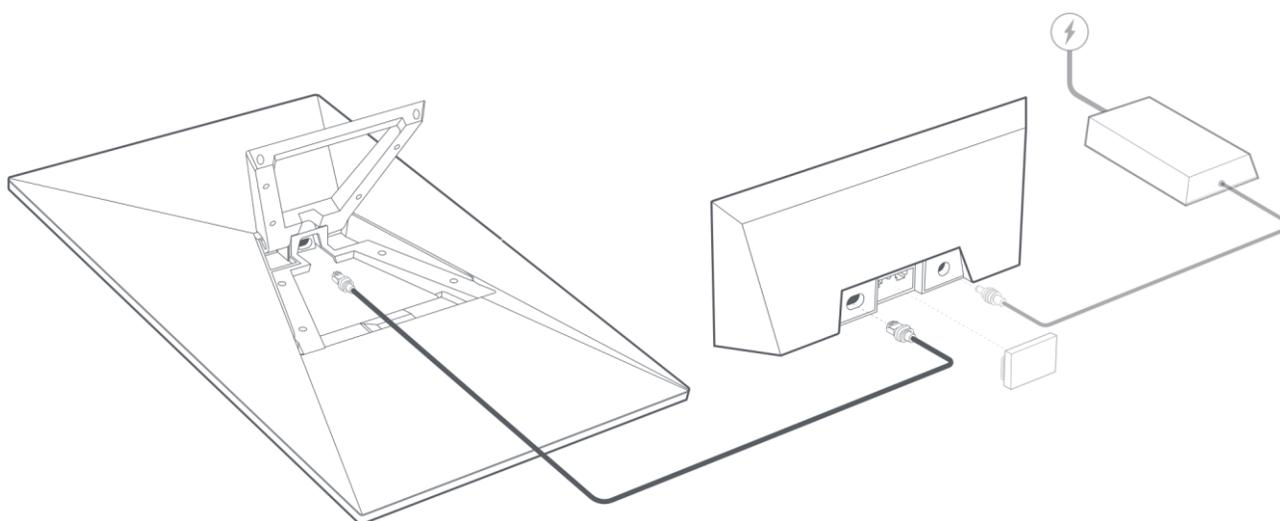


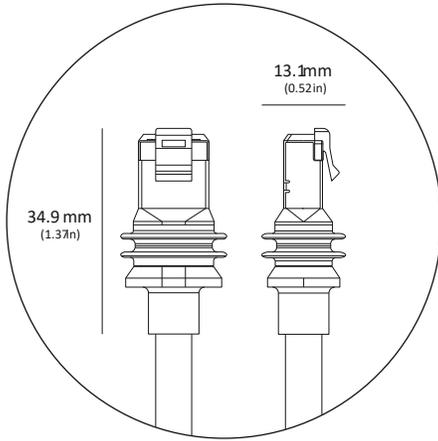

Pin 1
Shield
8
7
6
5
4
3
2
1

Wire Color
Drain - Bare Wire
Brown
White / Brown
Green
White / Blue
Blue
White / Green
Orange
White / Orange

Pin 2
Shield
8
7
6
5
4
3
2
1

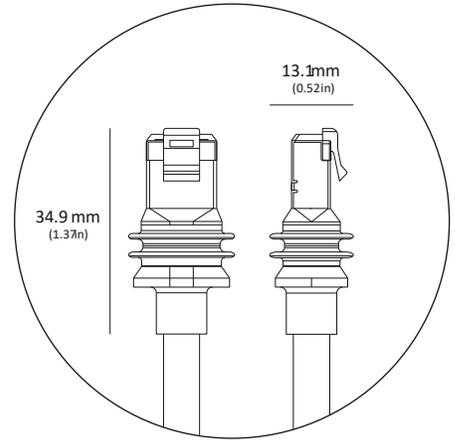

Power Supply Cable

